

# LED Integrated Bulkhead BHTD30-25407S-NNN

93073544

# **Product information**

A simple and elegant light fitting, designed with Integrated LED Light Module and dedicated optic, both for interior and exterior applications. The Integrated Bulkhead range offers a comprehensive choice of versions including two sizes, opal diffuser and optional sensor function. It is a wall and ceiling LED luminaire that can be utilised in versatile application ranges including damp environments, entrance halls, receptions, stairwells, corridors, circulation routes, rest areas and outside walls of buildings.

## **Application areas**













# **Product data**

Mounting type	Wall mounted
Dimensions	ø300 x 109 mm
Energy efficiency class (EEC)	A+
IP Rating	65
Certifications	CE
Impact resistance	IK10
Weight [kg]	1
DIALux description	GE - LED Integrated Bulkhead - 2400lm - 25W - 4000K - 80CRI - 93073544[SKU] - Wall mounted
Body colour	white

## Performance data

Rated life L70/B50 [h]	50000
Operating Voltage	220-240V
Ambient Temperature [°C]	-10C to +40C
Rated efficacy [lm/W]	96
Current [A]	1,2
Total system power	25
Rated lumens [lm]	2400
Rated power [W]	25
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	80+

# Optical data

Nominal beam angle [°]	125
------------------------	-----






## **Electrical data**

Nominal lamp power factor	>0.9
Class	Class II
Controllability	Constant Current Driver

# **Logistic data**

Product status	Available
Pack quantity	1

### **Photometric Data**

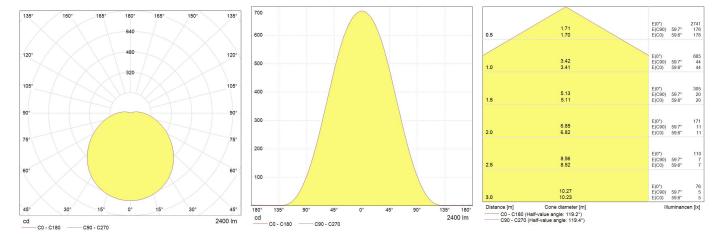

### **Downloads & Links**

Go to the catalog site (HTTP)

Datasheet (PDF)

**Images (HTTP)** 

Dialux offline Plugin (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)